



扫描二维码
关注康力电梯门户网站
Scan the QR code and pay attention to
CANNY ELEVATOR Portal Website



扫描二维码
关注康力电梯微信公众号
Scan the QR code and pay attention to
CANNY ELEVATOR WeChat Public Number

KONL® 康力电梯
CANNY ELEVATOR

KRF/KLRP

自动人行道
MOVING WALK



康力电梯股份有限公司 CANNY ELEVATOR CO.,LTD.

○地址: 江苏省苏州高新技术产业开发康力大道888号
○电话: 0512-63290000
○传真: 0512-63290938
○网址: www.canny-elevator.com
○电子邮箱: (国内) marketing@canny-elevator.com
(国外) export-canny@163.com
export@canny-elevator.com
○400客户服务热线: 400-188-2367
○邮编: 215213

○Add: No.888, Kangli Road, FQHD New & Hi-Tech Industrial
Development Zone, Jiangsu Province, China.
○Tel: +86-512-63290000 63297851
○Fax: +86-512-63290709
○URL: www.canny-elevator.com
○E-mail: export-canny@163.com
export@canny-elevator.com
○P.C: 215213

本册为一般信息提供资料, 我们保留对产品设计和制造的权利, 所有图片和颜色可能与实物有所差异, 请以实物为准。
康力电梯股份有限公司 © 2016-V1.0版

自动人行道

Moving
Walk

大音希声 大象无形

Great Sound is Hard to Hear,
Great Form Has No Shape



机场



火车站



百货商场

大宽度、大流量

康力自动人行道不断引进和开发先进技术，

完美打造大宽度大流量自动人行道，

适用于大型机场、火车站、百货商场等场所，节约建筑空间。

Large Width, High Flow

CANVY constantly introduces and develops advanced technologies, creates perfect large-width high-volume moving walks, which are suitable for large airports, train stations, shopping malls and other places, and builds new space.





超强输送，领衔空间

- ◆ 大高度高强度扶手护栏，裙板的防护高度达1000mm，增加了安全性。
- ◆ 踏板宽度最大可达到1.4米，实现了超大流量的乘客和货物运输。
- ◆ 先进的微电脑控制系统，容量大，反应速度快，稳定性高，功能更齐全。（选配）

1000mm

防护高度

1.4m

踏板宽度

先进

微电脑（选配）

Super Transportation, Leading Space

- ◆ Tall handrail and guardrail with high strength skirt panel with a height of 1000mm, increase safety performance.
- ◆ The maximum pedal width can reach 1.4 m, fully meet the requirement of large flow of passengers and cargo transportation.
- ◆ Advanced microcomputer board control system has high capacity, fast response, high stability, and complete functions. (Optional)



扶手护栏
Handrail /skirtboard



踏板 Panel



微电脑（选配）
Microcomputer Board (Optional)



精湛技艺，至极方休


- ◆ 桁架采用机器人焊接技术，大大提升制造工艺，具有品质精良，坚固耐用，美观大方等优点。
- ◆ 超静音主机有效预防震动，踏板具有特殊静音减震设计，有效防止噪音。
- ◆ PLC控制自动加油润滑系统，在运行过程中给传动链理想的自动润滑，延长传动机构的使用寿命。



机器人焊接技术
Robot Welding Technology



超静音主机
Ultra-quiet Main Engine



PLC控制自动加油
PLC Automatic Lubrication

Superb Artistry, Exquisite Elevator

- ◆ Truss adopts robot welding technology, which greatly enhances the manufacturing process and makes it more sturdy, wearable and beautiful.
- ◆ The ultra-quiet main engine can effectively prevent vibration; pedal adopts special noise damping design, tensioning frame device can effectively prevent noise.
- ◆ PLC automatic lubrication system provides ideal lubrication for gearing chain during operation, extending the service life of transmission device.



防止震动



防止噪音



扶手导轨滚动轮组
Handrail Guide Rail Chain Roller Group



传统自动人行道
Traditional Moving Walk



康力自动人行道
CANBY Moving Walk

大圆弧半径回转扶手导轨

匹配使用滚动轮组，有效减少摩擦，延长扶手的使用寿命。

Large Radius Rotary Handrail Guide Rail

It is matched with rolling wheel group, effectively reducing friction and prolonging the service life of handrail belt.






新型梳齿安全装置

当异物夹入运动踏板和静止梳齿板之间，
触发安装在踏板两侧的安全开关，自动人行道会自动停止。

New Comb Safety Device

If any foreign object is stuck between the moving pedal and stationary comb plate, the safety switches that is put on both sides of comb plate can be triggered, thus the moving walk will be automatically stopped.



安全定位，自由先行

再先进的技术功能，再美观的外在表现，都是为了您的安全出行所服务。在您看不见的地方，我们精心呵护，我们要做的就是您想要的。

Safety Positioning, Free Operation

All advanced technologies and beautiful appearances are designed to provide services for your safe travel, we will make you carefully protected from details, and provide you with what you want.



急停按钮
Emergency Stop Button



安全电路板
Safety Circuit Board

- 当自动人行道发生紧急故障时，可按下急停按钮，立即停止自动人行道运行，防止更大的事故发生。
- 采用先进的安全电路板对自动人行道安全保护装置进行实时监控，及时消除运行隐患，减少维护时间，从而确保乘客安全。
- 运行方向指示灯位于扶手带入口处，以显示运行或禁止运行，确保乘客安全自如地乘坐。（选配）
- When an emergency occurs to the moving walk, pressing the emergency stop button can immediately stop the moving walk from running and avoid more accidents.
- Advanced safety circuit board is adopted to provide real-time monitoring of the safety protection devices of moving walk, timely eliminate operational risks and reduce maintenance time, thus ensuring the safety of passengers.
- Running direction indicator are placed at the handrail belt entrance to indicate the operation or stop of moving walk, so as to enable passengers to have safe and free user experience. (Optional)




扶手入口安全装置

如果有异物卡在橡胶头和扶手带之间，
其橡胶头入口处的安全开关就会启动，使自动人行道暂停。

Handrail Entry Safety Device

If any foreign object is stuck between the rubber head and handrail, the safety switch behind the rubber entrance will start automatically to stop the moving walk from moving.



围裙照明（选配）

不仅展现了光采的美观大方，
同时还增强了自动人行道在整栋大楼中的可见度，
使乘坐更加舒心和安全。

Skirting Panel Lighting (Optional)


It not only demonstrates the beautiful light beam, but also emphasizes the visibility of moving walk in the entire building, making carriage more comfortable and safer.

安全装置 Safety Device

标准安全装置	Standard Safety Device
1 缺相、零位保护	Lack of Phase, Zero Phase Protection
2 马达超载保护	Motor Over-load Protection
3 电气回路保护	Electrical Appliance Loop Protection
4 扶手带入口保护	Handrail Belt Protection
5 梳齿安全保护装置	Comb Plate Safety Device
6 梯级防滑保护装置	Step Slipping Protection Device
7 驱动链轮安全保护装置	Broken Drive Chain Safety Device
8 梯级链轮安全保护装置	Broken Step Chain Protection
9 超速保护	Over-speed Protection
10 非操作逆转保护	Direction Reversal Protection
11 警戒线	Security Line
12 紧急停止按钮	Emergency Stop Button
13 围板保护	Skirt Panel Protection
14 制动带保护	Brake Protection

标准安全装置	Standard Safety Device
15 检修安全开关	Safety Inspection Switch
16 梯级照明	Step Illumination
17 启动警铃装置	Alarm Bell Starting Device
18 驱动板打开保护装置	Landing Plate Contact
19 扶手带速度监控	Handrail Belt Speed Monitor
20 围板检测	Skirt Panel Detect
21 制动距离检测	Braking Distance Inspection
22 梯级缺失检测装置	Step Missing Detection

可选用的安全装置	Optional Safety Device
23 防火卷帘门联动装置	Fire Shutter Door Interlocks
24 附加制动带	Auxiliary Brake

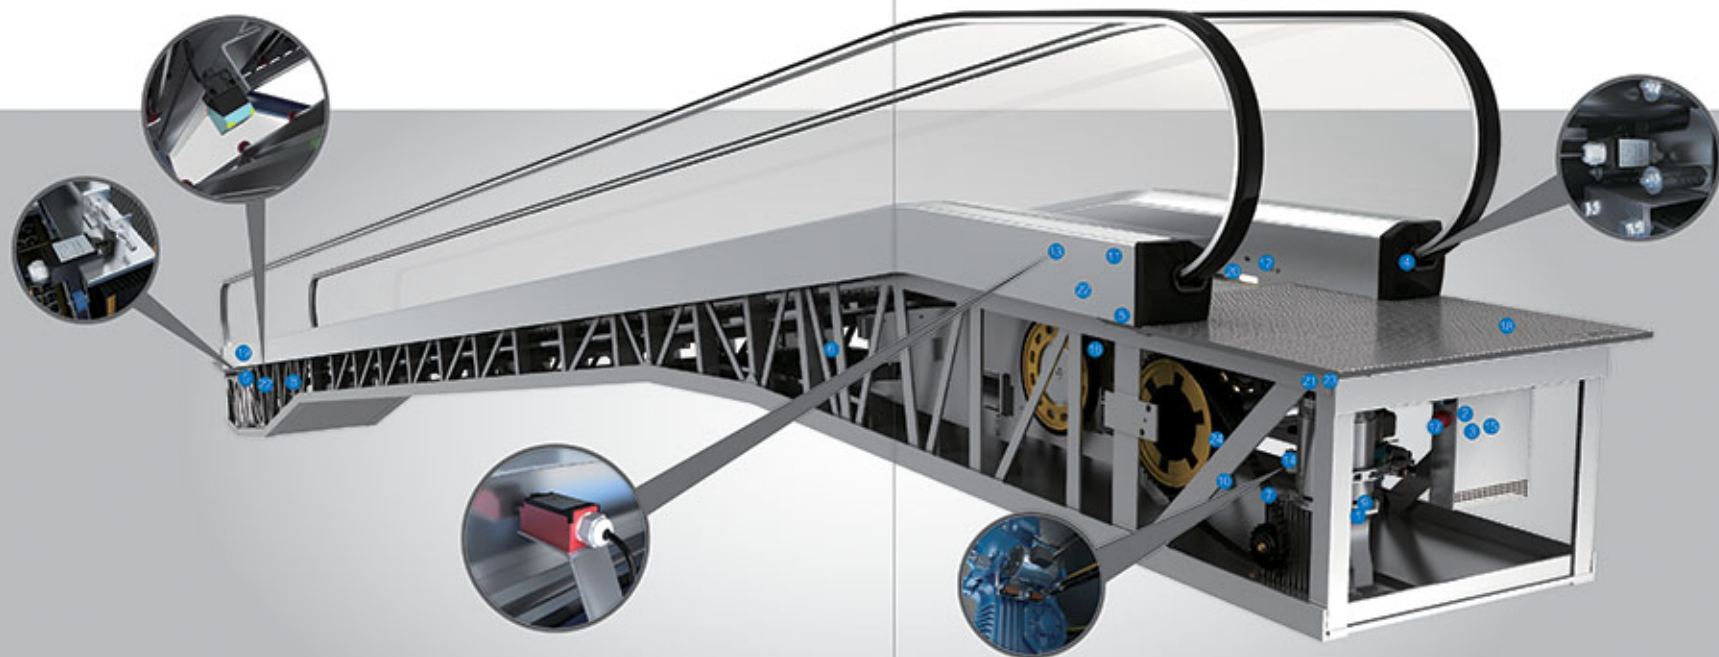

独特设计, 品鉴美感 Unique Design, Taste of Beauty

踏板 Pallet




黑色不锈钢 (KLRP, KRF-RS标配)
Black Stainless Steel (KLRP, KRF-RS Standard)




银灰色铝合金 (KRF, KRF-B标配)
Silver Grey Aluminum Alloy (KRF, KRF-B Standard)



黑色铝合金 (KRF, KRF-B选配)
Black Aluminum Alloy (KRF, KRF-B Optional)



边框黄色塑料 (选配)
Frame Yellow Plastic (Optional)



边框黄色喷涂 (选配)
Frame Yellow Spraying (Optional)

护壁板颜色 Balustrade Color



无色透明 (标配)
Colorless and Transparent (Standard)




透明带丝印 (选配)
Transparent Silk Screen (Optional)




古铜色 (选配)
Bronze (Optional)

梳齿 Comb Teeth



铝 (标配)
Aluminum (Standard)



铝表面黄色喷漆 (选配)
Aluminum Surface Yellow Paint (Optional)


扶手带颜色 Handrail Color



黑色 (标配)
Black (Standard)



灰色 (选配)
Gray (Optional)




红色 (选配)
Red (Optional)




橙色 (选配)
Orange (Optional)




蓝色 (选配)
Blue (Optional)



浅绿蓝 (选配)
Greenish Blue (Optional)




浅褐色 (选配)
Light Brown (Optional)




黄色 (选配)
Yellow (Optional)


围裙照明 Skirting Panel Lighting




白色 (选配)
White (Optional)



蓝色 (选配)
Blue (Optional)



红色 (选配)
Red (Optional)




黄色 (选配)
Yellow (Optional)

梳齿照明 Comb Teeth Lighting



白色LED (选配)
White LED (Optional)



黄色LED (选配)
Yellow LED (Optional)

运行方向指示灯 Running Direction Indicator



透明塑料LED显示 (选配)
Transparent Plastic LED Display (Optional)



黑色塑料点阵显示 (选配)
Black Plastic Matrix Display (Optional)

注: 图片系电脑绘制, 可能与实际略有不同, 以实物为准。

Note: Pictures have been drawn by computer. It might be slightly different from actual colors. Please take real product as criterion.

KRF单圆弧F型自动人行道
KRF Inclined Moving Walk



KRF-B单圆弧B型自动人行道
KRF-B Inclined Moving Walk



KRF-RS双圆弧F型自动人行道
KRF-RS Inclined Double-arc Moving Walk



KLRP水平型自动人行道
KLRP Horizontal Moving Walk



自动人行道规格表 Moving Walk Specification Table

型号 Model	KRF	KRF-B	KRF-RS	KLRP
主轴承额定直径 (mm) Main and bearing thread (bore size) (mm)	Φ70	Φ70	Φ70	Φ75
摆动角度 Angle of inclination	12°/11°/10°	12°/11°/10°	12°/11°/10°	0°
额定行程 (mm) Rated stroke (mm)	1000/800	1000/800	1000/800	1400/1200/1000
额定速度 (mm/s) Rated speed (mm/s)	133.33	133.33	206.96	400/206.96
额定转速 (r/min) Rated speed (r/min)	0.50/0.65	0.50/0.65	0.50/0.65	0.50/0.65
最大提升高度 (m) Max. lift (m)	8	8	6	—
总行程 (m) Max. stroke (m)	—	—	—	12.4/11.4/10

自动人行道配置表 Moving Walk Configuration Table


型号/Model	KRF	KRF-B
箱体、锁芯类型/箱体/Type of Frame and Core Type (Exterior)	欧式430不锈钢板开缝拉盖型 Euro430 Stainless Steel Patch-Fit Core Plate Decking	欧式430不锈钢板开缝拉盖型 Euro430 Stainless Steel Patch-Fit Core Plate Decking
箱体、锁芯类型/锁芯/Type of Frame and Core Type (Interior)	欧式合金开缝拉盖型/欧式430不锈钢板开缝拉盖型 Austenitic Alloy Patch-Fit Core Plate Decking / Euro430 Stainless Steel Patch-Fit Core Plate Decking	欧式合金开缝拉盖型/欧式430不锈钢板开缝拉盖型 Austenitic Alloy Patch-Fit Core Plate Decking / Euro430 Stainless Steel Patch-Fit Core Plate Decking
面板/面板/Setting Panel (Exterior)	欧式430 不锈钢板带槽 Euro430 Stainless Setting Panel	欧式430 不锈钢板带槽 Euro430 Stainless Setting Panel
面板/面板/Setting Panel (Interior)	欧式304 不锈钢板带槽 Euro304 Stainless Setting Panel	欧式304 不锈钢板带槽 Euro304 Stainless Setting Panel
面板/面板/Panel (Exterior)	133.33mm暗插舌铝框夹盖 133.33mm Silver Plug Aluminium Clip	133.33mm暗插舌铝框夹盖 133.33mm Silver Plug Aluminium Clip
面板/面板/Panel (Interior)	133.33mm暗插舌金属盖 133.33mm Black Aluminium	133.33mm暗插舌金属盖 133.33mm Black Aluminium
把手/把手/Handle (Exterior)	黑色 Black	黑色 Black
把手/把手/Handle (Interior)	其他颜色 Other Colors	其他颜色 Other Colors
把手/把手/Handle (Exterior)	垂直 Vertical	垂直 Vertical
把手/把手/Handle (Interior)	垂直 Vertical	垂直 Vertical
锁芯/锁芯/Lock Cylinder (Exterior)	10mm 防钻防撬防盗安全锁 10mm Anti-Drill/Anti-Pick/Anti-Saw Safety Lock Cylinders	10mm 防钻防撬防盗安全锁 10mm Anti-Drill/Anti-Pick/Anti-Saw Safety Lock Cylinders
锁芯/锁芯/Lock Cylinder (Interior)	10mm 防钻防撬防盗安全锁 10mm Anti-Drill/Anti-Pick/Anti-Saw Safety Lock Cylinders	10mm 防钻防撬防盗安全锁 10mm Anti-Drill/Anti-Pick/Anti-Saw Safety Lock Cylinders

型号/Model	KRF-RS	KLRP
规格、结构型式/Type and Const. Mode	50x530x34 不锈钢板/钛合金板 50x530 Stainless Steel Plate / Titanium Alloy Plate Decking	50x530x34 不锈钢板/钛合金板 50x530 Stainless Steel Plate / Titanium Alloy Plate Decking
规格、结构型式/Type and Const. Mode	铝塑合金层/钛合金板/50x530x4 不锈钢板/钛合金板 Aluminum Alloy/Titanium Alloy Plate Decking / 50x530x4 Stainless Steel Plate/Titanium Alloy Plate Decking	铝塑合金层/钛合金板/50x530x4 不锈钢板/钛合金板 Aluminum Alloy/Titanium Alloy Plate Decking / 50x530x4 Stainless Steel Plate/Titanium Alloy Plate Decking
规格/型式/Type and Const. Mode	1.5mm 50x530 不锈钢板/钛合金板 1.5mm 50x530 Stainless Steel/Titanium Alloy Plate	1.5mm 50x530 不锈钢板/钛合金板 1.5mm 50x530 Stainless Steel/Titanium Alloy Plate
规格/型式/Type and Const. Mode	50x530x4 不锈钢板/钛合金板 50x530x4 Stainless Steel/Titanium Alloy Plate	50x530x4 不锈钢板/钛合金板 50x530x4 Stainless Steel/Titanium Alloy Plate
规格/型式/Type and Const. Mode	26x166 不锈钢板/钛合金板 26x166 Stainless Steel/Titanium Alloy Plate	26x166 不锈钢板/钛合金板 26x166 Stainless Steel/Titanium Alloy Plate
规格/型式/Type and Const. Mode	—	400 不锈钢板/钛合金板 400 Stainless Steel/Titanium Alloy Plate
颜色/Color	黑色 Black	黑色 Black
颜色/Color	其他颜色 Other Colors	其他颜色 Other Colors
规格/型式/Type and Const. Mode	垂直 Vertical	垂直 Vertical
规格/型式/Type and Const. Mode	垂直 Vertical	垂直 Vertical
规格/型式/Type and Const. Mode	10mm 钢化防弹安全玻璃 10mm Toughened Tempering Safety Glass Goggles	10mm 钢化防弹安全玻璃 10mm Toughened Tempering Safety Glass Goggles
规格/型式/Type and Const. Mode	10mm 钢化防弹安全玻璃 10mm Toughened Tempering Safety Glass Goggles	10mm 钢化防弹安全玻璃 10mm Toughened Tempering Safety Glass Goggles

土建参数

Parameter Construction Layout

KLRP Indoor

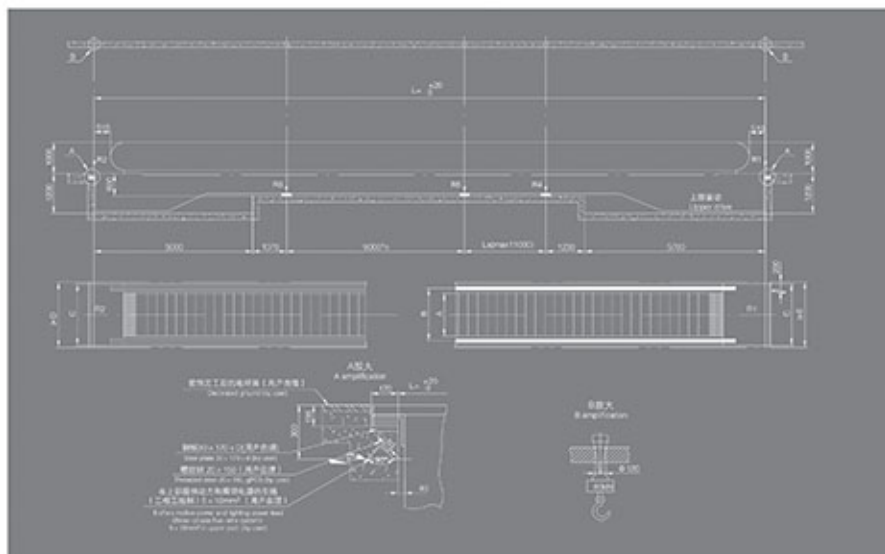

标准规格及尺寸

Standard specification and dimension

运行速度(m/s) Running speed(m/s)	0.5			
倾斜角度 Degree of inclination	0°			
踏板宽度(mm) Pallet width(mm)	800	1000	1200	1400
A	800	1000	1200	1400
B	1038	1238	1430	1648
C	1340	1540	1740	1950
D	1400	1600	1800	2010
E	1400	1600	1800	2010

说明

Description

1. 本图适用于平台安装的自动扶梯土建施工之用。
2. 销售部门应提供一式四份技术规格书, 其中2份给用户, 2份给设计院。
3. 尺寸单位为mm, 个别尺寸可能有更改, 如有更改, 恕不另行通知。

1. The figure can be applied to the civil engineering and construction for the installation of single automatic moving walk.
2. The Sales Dept. needs to make four copies of this drawing. Two copies shall return to the Technical Section after being stamped and signed by the users.
3. Size unit:mm. It is possible to change some individual sizes. If there is any modification, advance notice won't be given then.

全国分公司服务网络 National Branch Service Network

辽宁分公司 销售热线: 024-31981333 传真: 024-31981222 地址: 沈阳市大东区津江街26-1国际公寓2916	无锡分公司 销售热线: 0510-85961251 传真: 0510-85961252 地址: 无锡市滨湖区梁溪路58号华都国际大厦A座1501室
大连分公司 销售热线: 0411-86552277 传真: 0411-86552299 地址: 大连市中山区民康街15号顺泰大厦1602室	徐州分公司 销售热线: 0516-83919000 传真: 0516-83919005 地址: 徐州市庆丰路绿地城市广场写字楼A座706室
盘锦分公司 销售热线: 0427-26296811 传真: 0427-26296811 地址: 辽宁省盘锦市兴隆台区兴隆大街2102室	上海分公司 销售热线: 021-62820588/62827558 传真: 021-62820360 地址: 上海市延安西路1221号2203室
重庆分公司 销售热线: 0451-82340096 传真: 0451-82318292 地址: 黑龙江省哈尔滨市道外区群力第五大道399号汇展广场西楼1004室	浙江分公司 销售热线: 0571-89971040 传真: 0571-86200005 地址: 杭州市新德路19号莱茵广场1204室
吉林分公司 销售热线: 0431-85770000 传真: 0431-81003000 地址: 长春市经济技术开发区临河街5445号圣象汇商205室	安徽分公司 销售热线: 0551-62671797 传真: 0551-62313639 地址: 安徽省合肥市蜀山区望江路66号西湖国际广场A座603室
北京分公司 销售热线: 010-65505559 传真: 010-65505562 地址: 北京市朝阳区八里庄西里97号佳世2000商务中心4号楼1012室	天津分公司 销售热线: 0553-3856158 传真: 0553-3856158 地址: 天津市津南区八里庄西里97号佳世2000商务中心4号楼1012室
内蒙分公司 销售热线: 0471-6299116 传真: 0471-6922767 地址: 呼和浩特市赛罕区新华西街万达广场A座2110室	江西分公司 销售热线: 0791-88223016 传真: 0791-88309056 地址: 南昌市高新区紫阳大道绿地新都会(赣)大厦写字楼34层3402室
河北分公司 销售热线: 0311-66790031 88 8002 传真: 0311-87893130 地址: 石家庄市建设大街29号分众大厦518-620室	湖北分公司 销售热线: 027-82660063 传真: 027-85770099 地址: 武汉市江岸区淮海路中段泛海国际SOHO城2605-2606室
天津分公司 销售热线: 022-58306090 传真: 022-58306091 地址: 天津市红桥区红桥区与津浦铁路交口宝新创业中心B座2412室	湖南分公司 销售热线: 0731-85787755 传真: 0731-85787722 地址: 长沙市岳麓区岳麓大道57号奥克斯广场1楼1127-1129
山西分公司 销售热线: 0351-8371809 传真: 0351-8371809 地址: 太原市小店区平阳路1号金茂国际金融中心A座16层F座	重庆分公司 销售热线: 023-67877015 传真: 023-67877025 地址: 重庆市渝中区人民路160号万科锦园1楼26-6
陕西分公司 销售热线: 029-88332244 传真: 029-88332244-831 地址: 西安市高新区唐都路22号金茂国际广场11楼	四川分公司 销售热线: 028-61300037 传真: 028-67321129 地址: 四川省成都市高新区新丰街12号世纪金源1129
甘肃分公司 销售热线: 0931-8811752 传真: 0931-8432645 地址: 甘肃省兰州市城关区通远门822室708室	云南分公司 销售热线: 0871-68355199 传真: 0871-68355299 地址: 云南省昆明市五华区人民中路36号金茂大厦11A座
新疆分公司 销售热线: 0991-6815313 传真: 0991-6815296-815 地址: 新疆乌鲁木齐市沙依巴克区友好北路793号绿地中心1105室	贵州分公司 销售热线: 0851-86515286 传真: 0851-86515286/81 地址: 贵阳市观山湖区金阳南路66号世纪金源购物中心C栋写字楼23层5号
河南分公司 销售热线: 0371-60189221 传真: 0371-60189221 地址: 郑州市郑东新区康平路平乐国际商务中心写字楼一号楼12楼1707	广西分公司 销售热线: 0771-5517626 传真: 0771-5505713 地址: 南宁市民族大道30-1号新城国际1401室
山东分公司 销售热线: 0531-55690901 传真: 0531-55690905 地址: 济南市市中区经二路13号万达广场C座办公区2006室	广东分公司 销售热线: 020-38021000 传真: 020-38021410 地址: 广州市天河区天河路625号天悦广场东座1007-1008室
青海分公司 销售热线: 0532-68600088 传真: 0532-89082106 地址: 青岛市市北区山东路177号鲁商广场B座1106-1107	深圳分公司 销售热线: 0755-83865618 传真: 0755-83865618 地址: 深圳市福田区益田路3008号皇岗国际大厦1900室
福建分公司 销售热线: 0591-88590962 传真: 0591-88590962 地址: 福州市台江区中街225号恒和大厦1楼2113室	珠海分公司 销售热线: 0756-2200550 传真: 0756-2200550 地址: 珠海市香洲区世纪大道102号世纪华联大厦309室
江苏分公司 销售热线: 0512-65166725 传真: 0512-65166721 地址: 苏州工业园区西环路225号恒和大厦1楼2113室	福建分公司 销售热线: 0591-88590962 传真: 0591-88590962 地址: 福州市台江区中街225号恒和大厦1楼2113室